


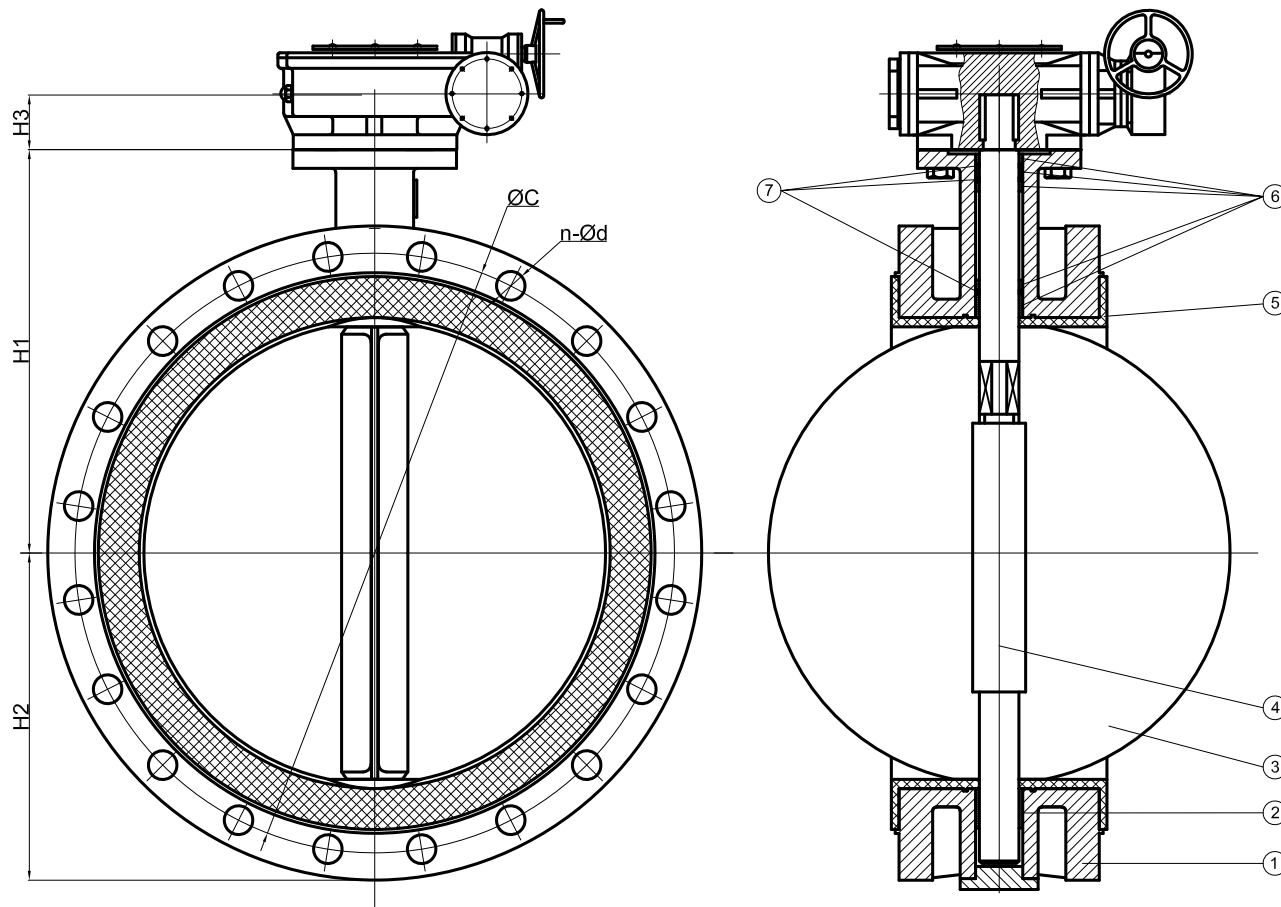

1. Design and manufacture according to API609;
2. Face to face according to EN558-1 13 series;
3. Flange drilling according to EN1092-2 PN6/10/16;
4. Pressure test according to API 598 ;
5. Top flange drilling according to ISO 5211.

Size	L	EN1092-2 PN10		EN1092-2 PN16		H1	H2	H3	Top Flg.	ØN	ØC1	n1-Ød1	Øc
		ØC	n-Ød	ØC	n-Ød								
DN1400	540	1590	36-44	1590	36-50	1000	935	200	F35	415	356	8-32	135
DN1500	570	1700	36-44	1710	36-57	1070	945	230	F35	415	356	8-32	145
DN1600	610	1820	40-50	1820	40-57	1150	1055	230	F35	415	356	8-32	155
DN1800	680	2020	44-50	2020	44-57	1200	1165	290	F40	475	406	8-39	175
DN2000	770	2230	48-50	2230	48-62	1363	1360	290	F40	475	406	8-39	185
Size	L	DIN2501 PN10		EN1092-2 PN 6		H1	H2	H3	Top Flg.	ØN	ØC1	n1-Ød1	Øc
		ØC	n-Ød	ØC	n-Ød								
DN2200	800	2440	52-56	2390	52-44	1500	1540	300	F48	560	483	12-39	200

Size	Name	Material	Remark
1	Body	Ductile iron	
2	Bushing	PTFE	
3	Disc	Ductile iron, Stainless steel, Aluminum Bronze	
4	Stem	Stainless steel	
5	Seat	EPDM, NBR(Buna N), Viton	
6	Bushing	PTFE	
7	O-ring	EPDM	
DRN	wang	WEIGHT	MATERIAL
CHK		SCALE	
APP		DATE	03/14/2025
hiwa			Butterfly Valve
B70F-SX-DN1400-DN2200			
REV	20250314a		